

- Main Config** - 1 Full Config,
 - 2 BIAB + Sparge,
 - 3 BIAB No Sparge
 (2bit)

Kettle Volume xxxL Passed to safety check function, compares with selected recipe to ensure no conflicts (max 127L, 7 bit)

Mash tun volume xxxL Passed to safety check function, compares with selected recipe to ensure no conflicts (max 127L, 7 bit)

Tap or tank connected sparge (decides if pump is running or not during sparge)

Cooling y/n

Wort or Water recirculation? [sets direction of valve 1 in cooling stage (If water and pumped transfer desired, prompt user to r lines after cooling is complete)]


Pumped Transfer y/n

Tap or Prefilled mash?

Heating Method (Internal heater/rims system)


1 Tank
 0 Tap
 Sparge Tap or Tank

1 Wo
 0 Wo
 Wort or Water Recirculation

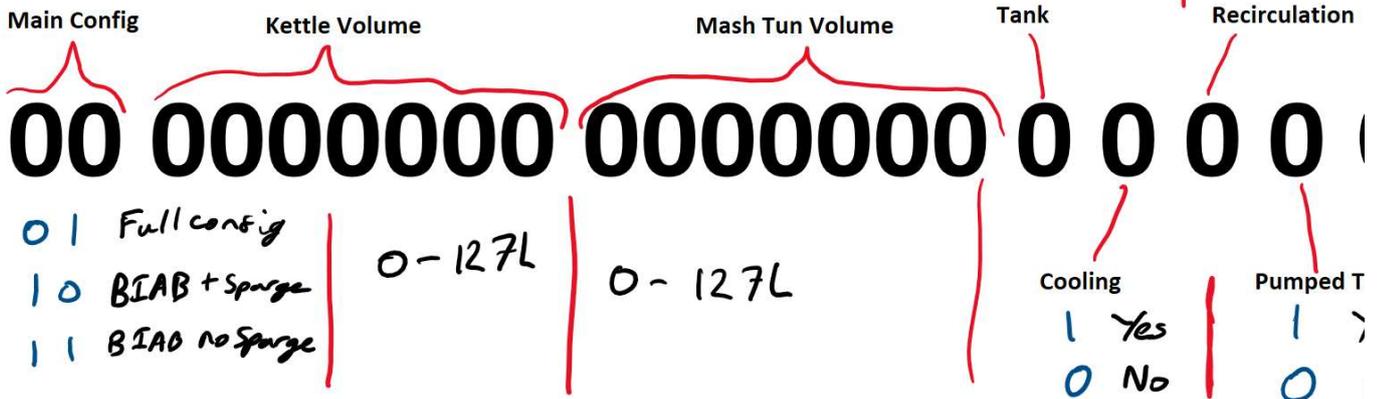


21 bits total

Full Config

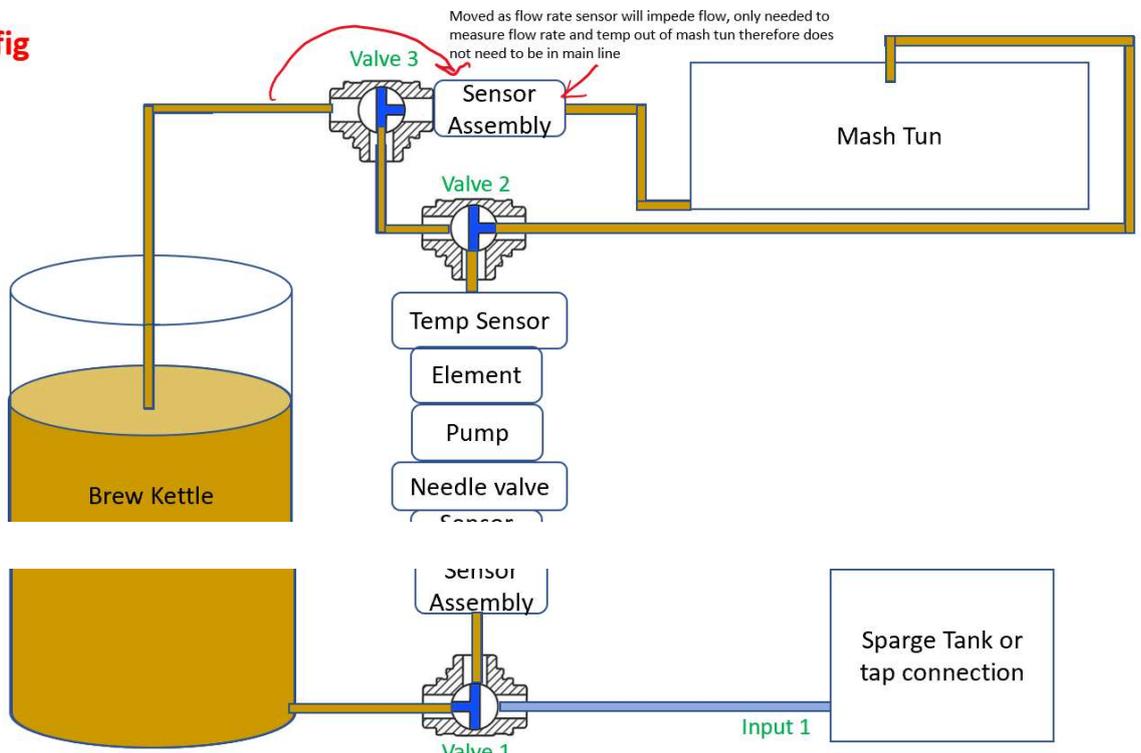


BIAB + Sparge Config

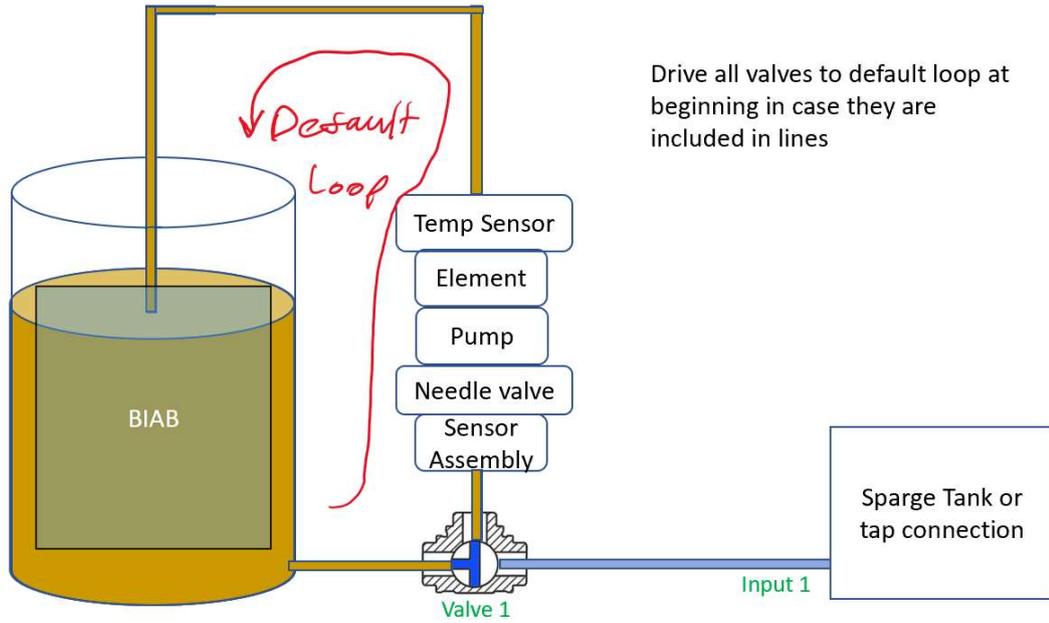

Drive all valves to default loop at beginning in case they are included in lines

BIAB No Sparge Config

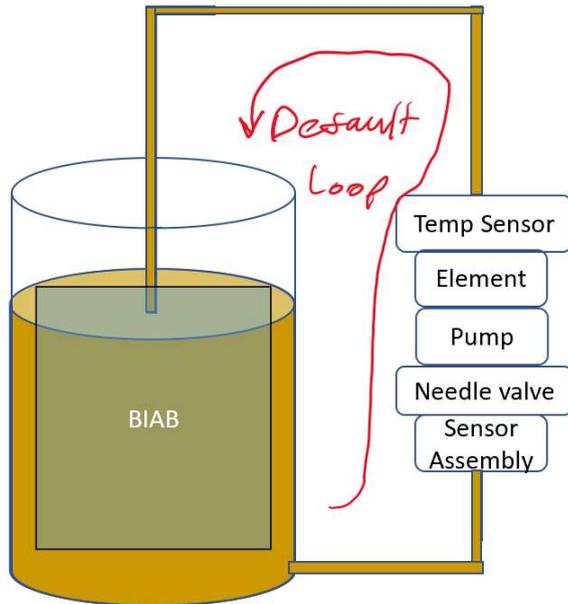

Drive all valves to default loop at beginning in case they are included in lines